

**RECESSED 1" DIA.
MAGNETIC CONTACT
MSS100-6 SERIES**






FEATURES:

- * 1" Dia. Recessed Magnetic Contact
- * 12" #22 AWG Wire Leads
- * Rare Earth Magnet
- * Self Locking in Steel and Wood
- * E.O.L. Resistors, Diodes and Supervisory Loops Available
- * Contacts and Magnets Available Separately
- * Colors: White, Brown, Black and Gray
- * Lifetime Warranty
- * Safety Approvals



MAGNET

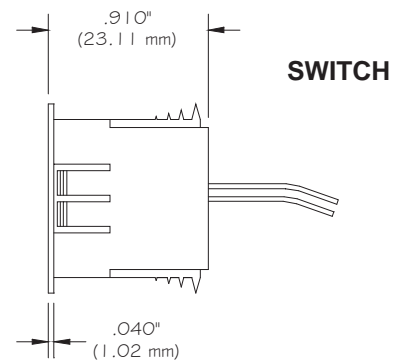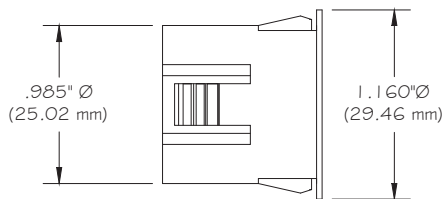

Part Number	Loop Type	Electrical Configuration	Gap In Steel (Inch / mm)	Maximum Initial Contact Resistance (Ohm)	Maximum Contact Rating (W)	Maximum Switching Voltage (VDC/VAC)	Maximum Switching Current (A)
MSS100-6	Closed	N/O	1/2 (13)	.100	10	100	.500
MSS100-6W	Closed	N/O	1 (25)	.100	10	100	.500
MSS100-1	Open	N/C	1/2 (13)	.100	3	30	.2
MSS100-1W	Open	N/C	1 (25)	.100	3	30	.2
MSS100-4	Open/Closed	SPDT	1/2 (13)	.100	3	30	.2
MSS100-4W	Open/Closed	SPDT	1 (25)	.100	3	30	.2
MSS100-4Y	2 X O/C	DPDT	1/2 (13)	.100	3	30	.2
MSS100-4WY	2 X O/C	DPDT	1 (25)	.100	3	30	.2